


DECK REVIVE

*Industrial Strength Cementitious Overlay Coating
for Weathered Wood Decking Surfaces*



UNLIMITED COLOR SELECTION mixes with any 100% acrylic latex paint!

Why Does Wood Fail?



Wood begins to degrade at the logging stage.

The "lignin" (organic polymer in wood) eventually fails and releases along the grain causing cracking and splitting. Cracks then allow moisture to enter the wood.

Wood then begins to delaminate and splinter and eventually, due to rot, will disintegrate

Most stains and paints provide color but do nothing to contribute to sealing cracks to prevent further degradation.

Deck Revive is a decorative option to extend the life of your deck and avoid costly replacement (typically \$5-\$7 per sq. ft.).



A Superior Industrial Strength Cementitious Overlay Coating for Weathered Wood Decking Surfaces

Deck Revive is a highly durable, fade resistant, eco-friendly coating that protects wood from the constant expansion and contraction cycle that destroys wood. Deck Revive mixes with any exterior 100% acrylic latex gloss paint making the color palette endless! Deck Revive is a cost effective and beautiful option to replacement of wood deck surfaces. **DON'T REPLACE, RESURFACE!**

DECK REVIVE IS AVAILABLE IN BOTH FULL SIZE AND QUARTER SIZE KITS

Deck Revive Features & Benefits

- Permeability rating allows moisture to pass through the film in both directions providing superior adhesion & durability
- EASY TO APPLY. Dries quickly for a timely "Return to Service". Same day application for PermaBond Primer and Deck Revive
- Creates a safe, slip resistant surface that meets American Disability Act Requirements
- Cost effective option to replacement of deck boards
- Unlimited color selection
- Fills in small cracks and locks down splinters for a safe walking surface
- No VOC's and No Odor/Water based and non-toxic
- Clean up with water



"THE SCIENCE OF DECK REVIVE"




Deck Revive Product Specifications


- Coverage:
 - FULL KIT**
Approx. 200 sq. ft. per kit at two coats
 - QUARTER KIT**
Approx. 50 sq. ft. per kit at two coats
- VOC (reg./coating):
0 lbs./gl. or g/l
- VOC (act/material):
0 lbs./gl. or g/l
- VOC Ratio:
0 lbs. VOC/lbs. Solids
- HAPS Ratio:
0 lbs. HAPS/lbs. Solids
- Pot Life:
Use materials within 24 hours after blending
- Shelf Life:
Two years @77° F if unopened and stored in a cool dry area. Always rotate stock.
- Storage:
Keep away from heat or sparks. Do not allow to freeze.

Why does **DECK REVIVE** offer superior performance when compared to other deck coatings? Many deck coatings available today use elastomeric paints and silica sand to provide a solid color non-skid surface. These elastomeric coatings, while flexible, have low breathability and trap moisture in the wood surface often resulting in a bubbling or peeling film and coating failure.

Deck Revive uses a proprietary cementitious dry chemistry and a strongly adhering blend of acrylic polymers. This makes Deck Revive extremely breathable allowing water to evaporate from the wood and pass through the coating. This breathability allows Deck Revive to retain excellent adhesion to the wood surface and provide a long lasting low maintenance surface for your deck.

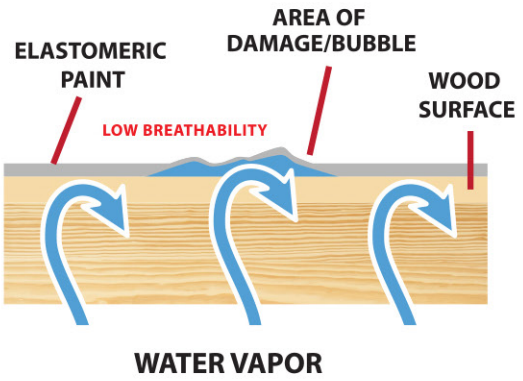

COMPETITION'S ELASTOMERIC PAINT PRODUCTS

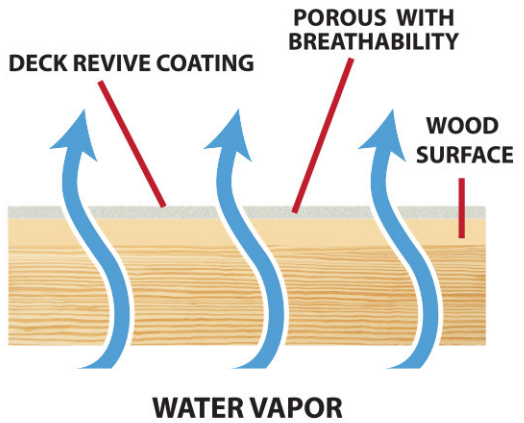

COST EFFECTIVE OPTION TO REPLACEMENT OF DECK BOARDS



PERMA BOND

A special bonding primer for use on surfaces that may have been compromised with questionable product and to aggressively promote adhesion and bonding of subsequent topcoats.

- No VOC's and No Odor/Water based and non-toxic
- Clean up with water
- Dries quickly
- Bonding agent designed to promote additional adhesion of subsequent topcoats
- One quart (or pint in a ¼ kit) of 100% acrylic gloss latex paint can be added for improved coverage and hide of subsequent topcoats
- Coverage - 400 square feet per gallon



PERMA FILL

A cementitious based filler designed to fill larger cracks, voids, nail and screw holes

- No VOC's and No Odor/Water based and non-toxic
- Clean up with water
- Dries quickly
- Extremely hard, yet crack and shrink resistant once topcoated



WANT TO KNOW MORE?

Scan here for a detailed demonstration video!



visit us at:



for more information about Deck Revive and the other products in the Gemini family visit:

www.gemini-coatings.com

or call: 800-262-5710